

06/20/00  
JP821 U.S. PTO

**PATENT APPLICATION TRANSMITTAL LETTER**  
(Large Entity)

Docket No.  
TSL1549

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Transmitted herewith for filing under 35 U.S.C. 111 and 37 C.F.R. 1.53 is the patent application of:

**Kimio Yamakawa; Minoru Isshiki; Katsutoshi Mine**

For: **ADHESIVE AND SEMICONDUCTOR DEVICES**

Enclosed are:

- ☐ Certificate of Mailing with Express Mail Mailing Label No.
- ☒ **TWO (2)** sheets of drawings.
- ☒ A certified copy of a **JP11/193829(1999)** application.
- ☒ Declaration ☐ Signed. ☒ Unsigned.
- ☒ Power of Attorney
- ☐ Information Disclosure Statement
- ☐ Preliminary Amendment
- ☐ Other:

JP851 U.S. PTO  
09/597218  
06/20/00

**CLAIMS AS FILED**

For	#Filed	#Allowed	#Extra	Rate	Fee
<b>Total Claims</b>	17	- 20 =	0	x \$18.00	\$0.00
<b>Indep. Claims</b>	2	- 3 =	0	x \$78.00	\$0.00
<b>Multiple Dependent Claims (check if applicable)</b> <input type="checkbox"/>					\$0.00
<b>BASIC FEE</b>					\$690.00
<b>TOTAL FILING FEE</b>					\$690.00

- ☐ A check in the amount of \_\_\_\_\_ to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **04-1520** as described below. A duplicate copy of this sheet is enclosed.
  - ☒ Charge the amount of **\$690.00** as filing fee.
  - ☒ Credit any overpayment.
  - ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
  - ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: June 14, 2000

Larry A. Milco  
Signature

Larry A. Milco  
Reg. No. 41,196  
Dow Corning Corporation  
Intellectual Property Dept. - Mail CO1232  
P. O. Box 994  
2200 W. Salzburg Road  
Midland, MI 48686-0994  
(517) 496-3161

CC:

## UNITED STATES PATENT APPLICATION

FOR

5

## ADHESIVE AND SEMICONDUCTOR DEVICES

**BACKGROUND OF INVENTION**

10           This invention relates to an adhesive for bonding semiconductor chips to their  
attachment members (hereinafter referred to as the chip mounting component) and to  
semiconductor devices in which a semiconductor chip therein is bonded to its chip  
mounting component by the adhesive. More particularly, this invention relates to an  
adhesive that can bond a semiconductor chip to its chip mounting component across a  
15   constant gap and that can provide a thorough relaxation of the mechanical stresses acting  
on the chip. The invention additionally relates to highly reliable semiconductor devices.

          Within the sphere of adhesives for bonding semiconductor chips to their chip  
mounting components, Japanese Laid Open (Kokai or Unexamined) Patent Application  
Number Hei 7-14859 (14,859/1995) teaches an adhesive that characteristically contains at  
20   least 5 weight% insulating powder consisting of at least one selection from inorganic  
insulators such as glasses, metal nitrides, and metal oxides that have a particle size of 50  
to 100  $\mu\text{m}$ . Japanese Laid Open (Kokai or Unexamined) Patent Application Number Hei  
7-292343 (292,343/1995) teaches an adhesive comprising a platinum compound,  
spherical organic or inorganic filler having a particle size of 10 to 100  $\mu\text{m}$  and a major  
25   axis-to-minor axis ratio (hereinafter referred to as the aspect ratio) of 1.0 to 1.5, an

organosilicon compound containing silicon-bonded alkoxy, organopolysiloxane containing at least 2 silicon-bonded hydrogen in each molecule, and organopolysiloxane containing at least 2 silicon-bonded alkenyl in each molecule.

The adhesives taught in Japanese Laid Open (Kokai or Unexamined) Patent

5 Application Numbers Hei 7-14859 and Hei 7-292343, however, are not entirely satisfactory. While these adhesives can provide a constant gap or space between the semiconductor chip and its chip mounting component, they cannot provide a wide chip-to-mounting component gap and hence are unable to thoroughly relax the mechanical stresses acting on the semiconductor chip.

10 The inventors achieved this invention as a result of intensive investigations into the problems described above. In specific terms, an object of this invention is to provide an adhesive that can bond a semiconductor chip to its chip mounting component across a uniform gap and that can thoroughly relax the mechanical stresses acting on the semiconductor chip. Another object of this invention is to provide highly reliable  
15 semiconductor devices.

## SUMMARY OF INVENTION

The adhesive of this invention is intended for the bonding of semiconductor chips to their chip mounting components and characteristically comprises a curable polymer  
20 composition that contains from 1 to 900 weight-ppm spherical filler that has an average particle size from 10 to 100  $\mu\text{m}$  and an aspect ratio from 1 to 1.5. Semiconductor devices

according to this invention are characterized in that a semiconductor chip therein is bonded to the mounting component for the chip by the aforementioned adhesive.

### BRIEF DESCRIPTION OF THE DRAWINGS

5                    Figure 1 is a cross section of an integrated circuit that is an example of a semiconductor device according to the present invention.

Figure 2 is a cross section of an integrated circuit that is also an example of a semiconductor device according to the present invention.

#### Reference Numbers

10	1	semiconductor chip
	2	semiconductor chip mounting component
	3	adhesive
	4	conductor
	5	lead
15	6	sealant/adhesive
	7	solder ball
	8	frame
	9	bump

20

### DESCRIPTION OF INVENTION

The present invention is an adhesive for bonding a semiconductor chip to an attachment member for the chip comprising a curable polymer composition comprising

09597219-06000

from 1 to 900 weight-ppm spherical filler having an average particle size of from 10 to 100  $\mu\text{m}$  and a major axis-to-minor axis ratio of from 1 to 1.5. The present invention is also semiconductor devices characterized in that a semiconductor chip is bonded to a mounting component thereof by the aforementioned adhesive.

5           The adhesive of this invention will be described in detail first. The spherical filler in this adhesive is the component for effecting bonding between the semiconductor chip and its mounting component across a constant gap. The average particle size of this spherical filler should be between 10 and 100  $\mu\text{m}$ . The basis for this range is as follows. The generation of a constant gap between the semiconductor chip and its mounting  
10       component becomes highly problematic in the case of adhesive that uses spherical filler with an average particle size below 10  $\mu\text{m}$ . At the other extreme, the use of spherical filler with an average particle size exceeding 100  $\mu\text{m}$  is undesirable when the generation of an overly large chip-to-mounting component gap is undesirable. The aspect ratio of the spherical filler under consideration should be within the range from 1 to 1.5 and is  
15       preferably from 1.0 to 1.1. It becomes increasingly difficult to generate a constant chip-to-mounting component gap in the case of adhesive that uses spherical filler whose aspect ratio exceeds the given upper limit. In a particularly preferred embodiment, the standard deviation on the particle size distribution of the spherical filler does not exceed 10% of the average particle size of the filler.

20           The spherical filler under consideration is exemplified by inorganic spherical fillers composed of silica, glass, alumina, aluminosilicate, silicon nitride, boron nitride,

09597418 "060000

silicon carbide, carbon, titanium oxide, aluminum, alumite, copper, silver, and stainless steel; and by organic spherical fillers composed of carbon, fluororesin, silicone resin, silicone rubber, epoxy resin, polyimide resin, polyphenylene sulfide resin, and polyetheretherketone resin. The spherical filler can be hollow or can be porous with pores on the surface and/or in the interior. Inorganic spherical fillers are preferred.

The spherical filler content in the adhesive under consideration should be from 1 to 900 weight-ppm and preferably is from 1 to 800 weight-ppm and more preferably is from 1 to 700 weight-ppm, in each case based on the weight of the curable polymer composition. It becomes increasingly difficult to obtain a constant chip-to-mounting component gap when the spherical filler content in the adhesive falls below the above-specified lower limit. At the other extreme, an inability to thoroughly relax the mechanical stresses acting on the semiconductor chip becomes increasingly prominent when the above-specified upper limit is exceeded. In addition, in a preferred embodiment, the spherical filler is present in the adhesive in an amount that avoids a stacking or superimposition of neighboring spherical filler particles one above the other in the space between the semiconductor chip and its mounting component. For example, the spherical filler is preferably present in an amount such that the spherical filler particle count per the coated area is at least 3 and no more than  $\{\text{coated area}/(\text{particle size of the spherical filler})^2\} \times 0.9$ . When the spherical filler content in the adhesive provides a spherical filler particle count per the coated area of less than 3 or more than  $\{\text{coated area}/(\text{particle size of the spherical filler})^2\} \times 0.9$  in which case neighboring particles of

05597218-060000

the spherical filler will overlap each other, it will become increasingly difficult to obtain a constant gap between the semiconductor chip and its mounting component.

The curable polymer composition used in the present adhesive composition is exemplified by curable epoxy resin compositions, curable silicone compositions, curable acrylic resin compositions, and curable polyimide resin compositions. The curable epoxy resin compositions are exemplified by curable epoxy resin compositions and curable silicone-modified epoxy resin compositions; the curable silicone compositions are exemplified by curable silicone compositions, curable epoxy-modified silicone compositions, curable acrylic-modified silicone compositions, and curable polyimide-modified silicone compositions; the curable acrylic resin compositions are exemplified by curable acrylic resin compositions and curable silicone-modified acrylic resin compositions; and the curable polyimide resin compositions are exemplified by curable polyimide resin compositions and curable silicone-modified polyimide resin compositions. Curable epoxy resin compositions and curable silicone compositions are preferred. In a particularly preferred embodiment, the curable polymer composition is a curable silicone composition due to the ability of curable silicone compositions to thoroughly relax the mechanical stresses acting on semiconductor chips and also due to the excellent heat resistance of curable silicone compositions. The curable silicone compositions are exemplified by those curable by condensation reactions, those curable by addition reaction, those curable by ultraviolet radiation, and those curable by organoperoxide-mediated radical reactions, with addition reaction-curable silicone compositions being preferred. The addition reaction-curable silicone compositions can

comprise, for example, (A) organopolysiloxane having at least 2 alkenyl groups in each molecule, (B) organopolysiloxane having at least 2 silicon-bonded hydrogen atoms in each molecule, (C) an organosilicon compound having Si-bonded alkoxy, and (D) a platinum catalyst.

5           The organopolysiloxane (A), which is the base component in such an addition reaction-curable silicone composition, must contain at least 2 alkenyl groups in each molecule. This alkenyl is exemplified by vinyl, allyl, butenyl, pentenyl, hexenyl, and heptenyl with vinyl being preferred. The non-alkenyl silicon-bonded groups in (A) are exemplified by monovalent hydrocarbon groups excluding alkenyl, for example, alkyl  
10   groups such as methyl, ethyl, propyl, butyl, pentyl, hexyl, heptyl, and octyl; aryl groups such as phenyl, tolyl, and xylyl; aralkyl groups such as benzyl and phenethyl; and halogenated alkyl groups such as 3-chloropropyl and 3,3,3-trifluoropropyl. Methyl and phenyl are preferred for the non-alkenyl silicon-bonded groups. The proportion of phenyl of the total silicon-bonded organic groups in (A) is preferably in the range of from 1 to 30  
15   mole% because this affords a composition with excellent cold resistance. Component (A) can be, for example, a single polymer having a straight-chain, partially branched straight-chain, branched-chain, cyclic, or resin-like molecular structure or can be a mixture of polymers with such molecular structures. Component (A) preferably has a viscosity at 25°C in the range of from 10 to 1,000,000 mPa·s.

20           The organopolysiloxane (B) is a crosslinker for the addition reaction-curable silicone composition and must contain at least 2 silicon-bonded hydrogen atoms in each molecule. The silicon-bonded groups in (B) other than hydrogen are exemplified by

05597218-063000



monovalent hydrocarbon groups, for example, alkyl groups such as methyl, ethyl, propyl, butyl, pentyl, hexyl, heptyl, and octyl; aryl groups such as phenyl, tolyl, and xylyl; aralkyl groups such as benzyl and phenethyl; and halogenated alkyl groups such as 3-chloropropyl and 3,3,3-trifluoropropyl. Methyl and phenyl are preferred for the non-

5 hydrogen silicon-bonded groups. Component (B) can be, for example, a single polymer having a straight-chain, partially branched straight-chain, branched-chain, cyclic, or resin-like molecular structure or can be a mixture of polymers with such molecular structures. Component (B) preferably has a viscosity at 25°C in the range of from 1 to 10,000 mPa.s.

The the addition reaction-curable silicone composition composition preferably  
10 contains component (B) in an amount that provides from 0.3 to 10 moles silicon-bonded hydrogen from (B) per mole alkenyl in (A). The composition will not undergo a satisfactory cure when the addition of component (B) provides less silicon-bonded hydrogen per mole alkenyl in (A) than the lower limit of the given range. When the addition of (B) provides more silicon-bonded hydrogen per mole alkenyl in (A) than the  
15 upper limit of the given range, the cured product will exhibit diminished mechanical strength.

The organosilicon compound (C) functions to improve the adherence of the addition reaction-curable silicone composition and must contain at least 1 silicon-bonded alkoxy group in the molecule and preferably contains at least 3 silicon-bonded alkoxy  
20 groups in the molecule. The alkoxy in (C) can be, for example, methoxy, ethoxy, propoxy, or butoxy with methoxy being preferred. The other silicon-bonded groups in (C) can be exemplified by the hydrogen atom; the hydroxyl group; functional organic

groups such as 3-glycidoxypropyl, 2-(3,4-epoxycyclohexyl)ethyl, and 3-methacryloxypropyl; and monovalent hydrocarbon groups, for example, alkyl groups such as methyl, ethyl, propyl, butyl, pentyl, hexyl, heptyl, and octyl; alkenyl groups such as vinyl, allyl, butenyl, pentenyl, and hexenyl; aryl groups such as phenyl, tolyl, and xylyl; aralkyl groups such as benzyl and phenethyl; and halogenated alkyl groups such as 3-chloropropyl and 3,3,3-trifluoropropyl. Component (C) preferably contains the vinyl group, silicon-bonded hydrogen, or an epoxy-functional organic group such as 3-glycidoxypropyl or 2-(3,4-epoxycyclohexyl)ethyl.

Component (C) can be exemplified by 3-glycidoxypropyltrimethoxysilane; 3-glycidoxypropyltriethoxysilane; 2-(3,4-epoxycyclohexyl)ethyltrimethoxysilane; vinyltrimethoxysilane; organosiloxane oligomer whose molecule contains silicon-bonded alkoxy, SiH, and 3-glycidoxypropyl or 2-(3,4-epoxycyclohexyl)ethyl; and organosiloxane oligomer whose molecule contains silicon-bonded alkoxy, silicon-bonded alkenyl, and 3-glycidoxypropyl or 2-(3,4-epoxycyclohexyl)ethyl.

The addition reaction-curable silicone should contain from 0 to 20 weight parts component (C) per 100 weight parts component (A). A composition containing component (C) in excess of the upper limit of the given range will give a cured product with diminished mechanical strength.

The platinum catalyst (D) is for inducing the addition reaction-mediated cure of the addition reaction-curable silicone composition. Component (D) is exemplified by platinum black, platinum supported on silica micropowder, platinum supported on active carbon, platinum supported on alumina powder, chloroplatinic acid, alcohol solutions of

chloroplatinic acid, olefin complexes of platinum, alkenylsiloxane complexes of platinum, carbonyl complexes of platinum, and thermoplastic resin powder with an average particle size  $\leq 10 \mu\text{m}$  that contains one or more of the previously listed platinum catalysts. The thermoplastic resin in the last-named example can be polystyrene resin, nylon resin, polycarbonate resin, silicone resin, and so forth.

Component (D) should be added to the addition reaction-curable silicone composition in sufficient quantity to induce the cure of the composition. In specific terms, component (D) is preferably added to the composition in an amount that provides from 1 to 1,000 weight-ppm platinum metal.

The addition reaction-curable silicone composition preferably contains an addition-reaction inhibitor as an optional component. This addition-reaction inhibitor is exemplified by alkyne alcohols such as 3-methyl-1-butyn-3-ol, 3,5-dimethyl-1-hexyn-3-ol, and 3-phenyl-1-butyn-3-ol; ene-yne compounds such as 3-methyl-3-penten-1-yne and 3,5-dimethyl-3-hexen-1-yne; and by 1,3,5,7-tetramethyl-1,3,5,7-tetravinylcyclotetrasiloxane, 1,3,5,7-tetramethyl-1,3,5,7-tetrahexenylcyclotetrasiloxane, and benzotriazole. The composition preferably contains from 10 to 50,000 weight-ppm addition-reaction inhibitor.

The present adhesive composition can contain, as an optional component, an organic resin powder, metal powder, or inorganic powder, in each case with an average particle size no greater than  $100 \mu\text{m}$ . The organic resin powder can be composed of, for example, a fluororesin or silicone resin; the metal powder can be composed of, for example, silver, nickel, or copper; and the inorganic powder can be, for example, silica,

09597E1B-062000  
titanium oxide, carbon black, alumina, quartz powder, and glass. More particularly,  
adhesive compositions containing inorganic powder with a specific surface area of 50 to  
500 m<sup>2</sup>/g are thixotropic and inhibited the sedimentation and separation of the previously  
described spherical filler. The present adhesive composition can also contain, for  
5 example, heat stabilizer, flame retardant, colorant, and organic solvent.

The present adhesive composition can be, for example, a relatively low viscosity  
fluid, a relatively high viscosity fluid, a grease, or a paste. The present adhesive  
composition can be applied by using an ejector- or extruder-type device such as a  
dispenser. In addition, the present adhesive composition can be formed in a sheet or film  
10 configuration by partially crosslinking the adhesive or, when the curable polymer  
composition takes the form of a hot-melt adhesive, by converting the composition to a  
sheet or film.

The present adhesive composition preferably cures to give a rubber or gel. The  
adhesive can be cured at room temperature or by heating. In the case of heating, the  
15 adhesive composition is preferably heated, for example, to 50 to 200°C using a heating  
lamp, hot plate, heated block, or forced hot-air convection oven.

Semiconductor devices according to this invention will now be considered in  
detail. The characteristic feature of a semiconductor device according to this invention is  
that a semiconductor chip therein is bonded to its chip mounting component by the  
20 hereinabove-described adhesive. The semiconductor device can be, for example, an  
integrated circuit, LSI device, or VLSI device. Semiconductor devices according to this

invention will be explained in detail with reference to the drawings appended herewith.

In the semiconductor device shown in Figure 1, a semiconductor chip **1** is bonded to a semiconductor chip mounting component **2** (a chip carrier in Figure 1) by adhesive **3**. In this case the semiconductor chip **1** is bonded facing the semiconductor chip mounting

5 component **2**. Conductors **4** are formed on the surface of the semiconductor chip mounting component **2** that faces the semiconductor chip **1**. The conductors **4** and the semiconductor chip **1** are electrically connected by leads **5**. The leads **5** are sealed or packed, in their entirety or partially, by a sealant/filler **6**. The semiconductor chip mounting component **2** in the semiconductor device shown in Figure 1 has been provided  
10 with solder balls **7** to enable mounting of the semiconductor device on a substrate. The semiconductor device in Figure 1 has also been provided with a frame **8** in order to protect the semiconductor chip **1** from external mechanical stresses. This frame **8** is an optional feature for semiconductor devices according to this invention.

In the semiconductor device shown in Figure 2, a semiconductor chip **1** is bonded  
15 to a semiconductor chip mounting component **2** (a circuit substrate in Figure 2) by adhesive **3**. In this case, again, the semiconductor chip **1** is bonded facing the semiconductor chip mounting component **2**. Conductors **4** are formed on the surface of the semiconductor chip mounting component **2** that faces the semiconductor chip **1**. The conductors **4** and the semiconductor chip **1** are electrically connected by bumps **9**. These  
20 bumps **9** are sealed or packed, in their entirety or partially, by a sealant/filler **6**. In order to mount the semiconductor device in Figure 2 on a substrate, leads are provided that

electrically connect with the conductors 4. Although not shown in Figure 2, the semiconductor chip 1 may be sealed with a resin sealant.

Neither the semiconductor chip nor the semiconductor chip mounting component are critical for semiconductor devices of this invention. The semiconductor chip

5 mounting component can be, for example, a ceramic-type chip mounting component for example an alumina or glass component; an organic resin-type chip mounting component for example an epoxy resin, glass fiber-reinforced epoxy resin, polyimide resin, or bismaleimide triazine resin component; or a metal-type chip mounting component, for example a stainless steel or copper component, and can be, for example, a rigid circuit

10 substrate or chip carrier or a flexible circuit substrate or chip carrier. The conductors can be formed on the surface or in the interior of the semiconductor chip mounting component by such means as printing, vapor deposition, gluing, lamination, plating, and so forth. Outer connecting terminals such as a ball grid (e.g., solder balls) or pin grid and other electrical elements or components may also be provided or mounted. The

15 component that electrically connects the semiconductor chip with the conductors of the semiconductor chip mounting component can be, for example, bonding wires, leads, or bumps. In order to relax the stresses acting on such components when the semiconductor device is subjected to thermal shock in their bonding wire and lead implementations these components are preferably curved or bent and in their bump embodiments are preferably

20 made of a material with a small Young's modulus.

The use of a sealant/filler is preferred for the purpose of improving the reliability of semiconductor devices according to this invention. The sealant/filler is exemplified by

Silicone sealant/fillers are preferred. In order to effect sealing or packing of the component that electrically connects the semiconductor chip with the conductors on/in the corresponding chip mounting component, the sealant/filler is preferably a paste or liquid with liquids being particularly preferred. With regard to the procedure for sealing or packing the aforesaid electrically connecting component with the sealant/filler, the sealant/filler may be cured, for example, by heating with a hot gas current or thermal radiation, or can be brought into contact with moisture, or can be exposed to ultraviolet radiation or an electron beam. In the case of semiconductor devices of this invention, a preferred approach for sealing or packing with the sealant/filler composition comprises the cure of a thermosetting sealant/filler by heating. This sealant/filler is preferably a sealant/filler that upon the application of heat thereto forms a cured product that is a gel or rubber at ambient temperature.

The particular process for fabricating semiconductor devices according to the present invention is not critical. As an example of a process by which the semiconductor device in Figure 1 can be fabricated, the semiconductor chip **1** and the semiconductor chip mounting component **2** can first be attached together facing each other using the

above-described adhesive; the adhesive can then be cured; and the semiconductor chip **1** and the conductors **4** of the semiconductor chip mounting component **2** can thereafter be electrically connected by the leads **5**. This electrical connection can, however, also be effected prior to adhesive cure. In addition, these leads **5** can be sealed or packed, in their entirety or partially, with a sealant/filler and the sealant/filler can then be cured. As an example of a process by which the semiconductor device in Figure 2 can be fabricated, the semiconductor chip **1** and the semiconductor chip mounting component **2** can first be attached together facing each other using the above-described adhesive; the adhesive can then be cured; and the semiconductor chip **1** and the conductors **4** of the semiconductor chip mounting component **2** can thereafter be electrically connected by the bumps **9**. Again, this electrical connection can also be effected prior to adhesive cure. These bumps **9** can also be sealed or packed, in their entirety or partially, with a sealant/filler and the sealant/filler can then be cured. A frame can be used for the purpose of preventing sealant/adhesive outflow during this step. A metal or plastic frame can be used for this purpose, but the frame can also be formed from a curable, thixotropic liquid-form or grease-form organic resin composition. A frame having the form of a rubber or gel is particularly preferred.

### Examples

The present adhesive compositions and semiconductor devices are explained in greater detail below through working examples. The viscosity values reported in the examples were measured at 25°C using a rotational viscometer (single cylinder geometry,



Vismetron V from Shibaura System Co.). The procedure for fabricating the semiconductor devices and the evaluation methodologies are described below.

### **Semiconductor device fabrication**

Semiconductor devices as shown in Figure 2 were fabricated as follows. The  
5 adhesive was coated on a circuit substrate and the semiconductor chip (area = 50 mm<sup>2</sup>)  
was then applied onto the adhesive. The semiconductor chip was then bonded onto the  
circuit substrate by curing for 30 minutes at 150°C while pressing with a hot-press  
bonder. The semiconductor chip and the conductors formed on the circuit substrate were  
subsequently electrically connected by bumps. Finally, the bumps were completely  
10 vacuum impregnated at 10 torr with a thermosetting silicone sealant/filler followed by  
cure of the sealant/filler by heating for 30 minutes at 150°C. Twenty semiconductor  
devices were fabricated by this procedure.

### **Measurement of the film thickness of the adhesive layer in the semiconductor devices**

15 The average thickness, minimum thickness, and maximum thickness of the  
adhesive layer were measured on 20 semiconductor devices by subtracting the thickness  
of the semiconductor chip and its mounting component (the thickness of the  
semiconductor chip and its mounting component were measured in advance) from the  
20 overall thickness of the semiconductor device.

### **Measurement of the spherical filler count in the adhesive layer of the semiconductor devices**

The spherical filler particle count per the coated area was determined by inspecting the adhesive-coated side with a microscope.


### Semiconductor device reliability testing

Each semiconductor device was subjected to thermal cycle testing with one cycle  
5 consisting of holding for 30 minutes at  $-55^{\circ}\text{C}$  and holding for 30 minutes at  $+150^{\circ}\text{C}$ .

Using the terminals of the conductors on the semiconductor device, electrical continuity testing was carried out after 1,000 cycles and after 3,000 cycles. The defect rate was determined from the number of devices that exhibited defective continuity.

Example 1. An adhesive with a viscosity of 7,000 mPa·s was prepared by mixing  
10 the following to homogeneity: 100 weight parts dimethylvinylsiloxyl-terminated dimethylpolysiloxane with a viscosity of 2,000 mPa·s and a vinyl content of 0.23 weight%, 1.5 weight parts trimethylsiloxyl-terminated methylhydrogenpolysiloxane with a viscosity of 20 mPa·s and a silicon-bonded hydrogen content of 1.6 weight%, 1 weight part organopolysiloxane with the average unit formula

15



20 0.1 weight part of a 1 weight% isopropanolic chloroplatinic acid solution, 0.05 weight part (this addition gave 500 weight-ppm in the adhesive) of a spherical silica micropowder with an average particle size of 40  $\mu\text{m}$  (standard deviation on the particle size distribution = 3  $\mu\text{m}$ ) and an aspect ratio of 1.05, 0.01 weight part 3-phenyl-1-butyne-

3-ol, and 2 weight parts fumed silica (average particle size = 30 nm, BET specific surface area = 200 m<sup>2</sup>/g) whose surface had been treated with hexamethyldisilazane. When heated for 30 minutes at 150°C, this adhesive produced a silicone rubber that gave a value of 30 for the type A durometer specified in JIS K-6253. Semiconductor devices were  
5 fabricated using the adhesive, and the results of evaluation of these semiconductor devices are reported in Table 1.

Comparative Example 1. An adhesive with a viscosity of 6,500 mPa·s was prepared as in Example 1, but in this case omitting the spherical silica micropowder (average particle size = 40 μm, standard deviation on the particle size distribution = 3 μm,  
10 aspect ratio = 1.05) that was used in Example 1. When heated for 30 minutes at 150°C, this adhesive produced a silicone rubber that gave a value of 28 for the type A durometer specified in JIS K-6253. Semiconductor devices were fabricated using the adhesive, and the results of evaluation of these semiconductor devices are reported in Table 1.

Comparative Example 2. An adhesive with a viscosity of 12,500 mPa·s was  
15 prepared as in Example 1, but in this case using 157 weight parts (this addition corresponded to 60 weight% in the adhesive) of the spherical silica micropowder (average particle size = 40 μm, standard deviation on the particle size distribution = 3 μm, and aspect ratio = 1.05) that was employed in Example 1. When heated for 30 minutes at  
150°C, this adhesive produced a silicone rubber that gave a value of 48 for the type A  
20 durometer specified in JIS K-6253. Semiconductor devices were fabricated using the

adhesive, and the results of evaluation of these semiconductor devices are reported in Table 1.

Comparative Example 3. An adhesive with a viscosity of 7,000 mPa·s was prepared as in Example 1, but in this case replacing the spherical silica micropowder (average particle size = 40  $\mu\text{m}$ , standard deviation on the particle size distribution = 3  $\mu\text{m}$ , aspect ratio = 1.05) that was used in Example 1 with an equal amount of silica micropowder that had an average particle size of 40  $\mu\text{m}$ , an aspect ratio of 2.0, and a standard deviation on the particle size distribution of 15  $\mu\text{m}$ . When heated for 30 minutes at 150°C, this adhesive produced a silicone rubber that gave a value of 28 for the type A durometer specified in JIS K-6253. Semiconductor devices were fabricated using the adhesive, and the results of evaluation of these semiconductor devices are reported in Table 1.

Example 2. An adhesive with a viscosity of 21,000 mPa·s was prepared by mixing 100 weight parts of a thermosetting epoxy resin composition with a viscosity of 20,000 mPa·s (TXEP-100 from Dow Corning Toray Silicone Company, Limited, containing 50 weight% spherical silica powder with an average particle size of 2  $\mu\text{m}$  and a maximum particle size of 8  $\mu\text{m}$ ) to homogeneity with 0.05 weight part (this addition gave 500 weight-ppm in the adhesive) spherical silica micropowder with an average particle size of 40  $\mu\text{m}$ , aspect ratio of 1.05, and standard deviation on the particle size distribution of 3  $\mu\text{m}$ . When heated for 2 hours at 150°C, this adhesive produced a cured epoxy resin that gave a value in excess of 95 for the type A durometer specified in JIS K-

6253. Semiconductor devices were fabricated using the adhesive, and the results of evaluation of these semiconductor devices are reported in Table 1.

09597e48-0e6000

Table 1.

	Example 1	Example 2	Comparative Example 1	Comparative Example 2	Comparative Example 3
thickness of the adhesive layer (μm)					
average value	48	49	34	80	55
maximum value	50	50	41	98	72
minimum value	43	45	19	55	47
spherical filler count	16	17	0	48000	17
semiconductor device defect rate (%)					
1,000 cycles	0	0	15	35	5
3,000 cycles	0	0	35	55	10

We claim:

1. An adhesive composition for bonding a semiconductor chip to an attachment member for the chip comprising a curable polymer composition comprising from 1 to 900 weight-ppm spherical filler having an average particle size of from 10 to 100  $\mu\text{m}$  and a major axis-to-minor axis ratio of from 1 to 1.5.
2. The adhesive composition of Claim 1, where the spherical filler has a particle size distribution with a standard deviation that does not exceed 10% of the average particle size of the filler.
3. The adhesive composition of Claim 1, where the curable polymer composition comprises from 1 weight-ppm to 700 weight-ppm spherical filler.
4. The adhesive composition of Claim 1, where the spherical filler is an inorganic spherical filler.
5. The adhesive composition of Claim 1, where the curable polymer composition is a curable silicone composition.
6. The adhesive composition of Claim 1, where the curable polymer composition is a curable epoxy resin composition.

0597218-060000

7. The adhesive composition of Claim 1, where the spherical filler has a major axis-to-minor axis ratio of from 1.0 to 1.1.

8. The adhesive composition of Claim 1, where the curable polymer composition is an addition reaction-curable silicone composition.

9. The adhesive composition of Claim 1 further comprising a thixotropic agent selected from the group consisting of organic resin powder, metal powder, and inorganic powder where the thixotropic agent has an average particle size of 100  $\mu\text{m}$  or less and a specific surface area of 50 to 500  $\text{m}^2/\text{g}$ .

10. A semiconductor device comprising a semiconductor chip bonded to an attachment member for the chip by an adhesive composition comprising from 1 to 900 weight-ppm spherical filler having an average particle size of from 10 to 100  $\mu\text{m}$  and a major axis-to-minor axis ratio of from 1 to 1.5.

11. The semiconductor device according to Claim 10, where the spherical filler has a particle size distribution with a standard deviation that does not exceed 10% of the average particle size of the filler.

12. The semiconductor device according to Claim 10, where the curable polymer composition comprises from 1 weight-ppm to 700 with-ppm spherical filler.



13. The semiconductor device according to Claim 10, where the spherical filler is an inorganic spherical filler.

14. The semiconductor device according to Claim 10, where the curable polymer composition is a curable silicone composition.

15. The semiconductor device according to Claim 10, where the curable polymer composition is a curable epoxy resin composition.

16. The semiconductor device according to Claim 10, where the spherical filler has a major axis-to-minor axis ratio of from 1.0 to 1.1.

17. The semiconductor device according to Claim 10, where the curable polymer composition is an addition reaction-curable silicone composition.

**ABSTRACT**

An adhesive composition for bonding semiconductor chips to their chip mounting components comprising a curable polymer composition comprising from 1 to 900 weight-ppm spherical filler having an average particle size of from 10 to 100  $\mu\text{m}$  and a major axis-to-minor axis ratio of from 1 to 1.5. Also, semiconductor devices in which a semiconductor chip therein is bonded to its chip mounting component by the aforesaid adhesive composition.

09597218-060000

Figure 1.


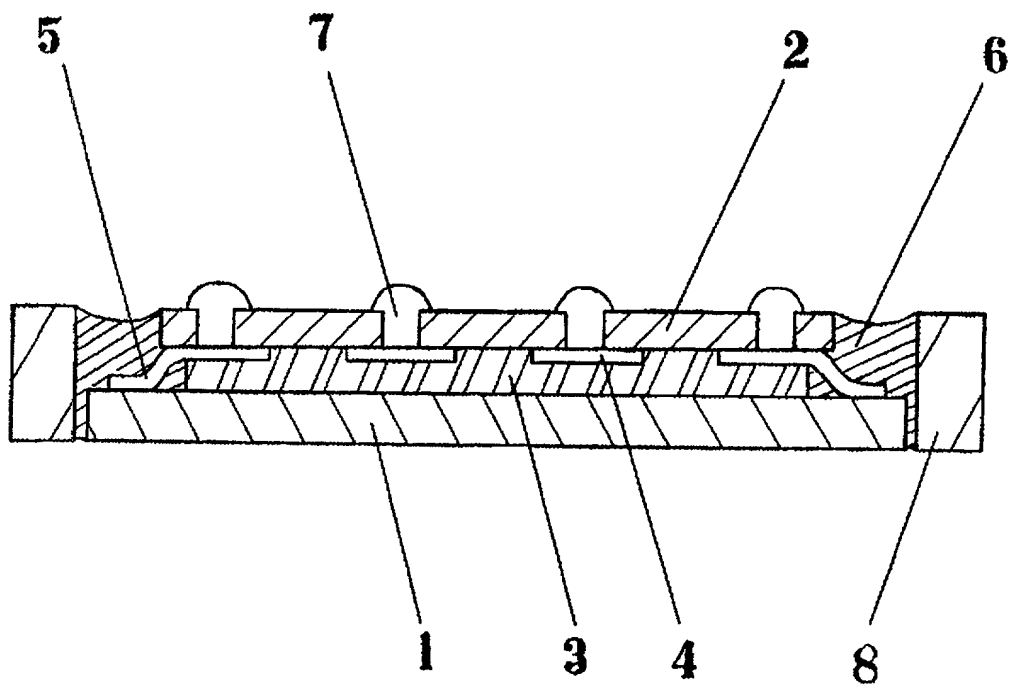


Figure 2.

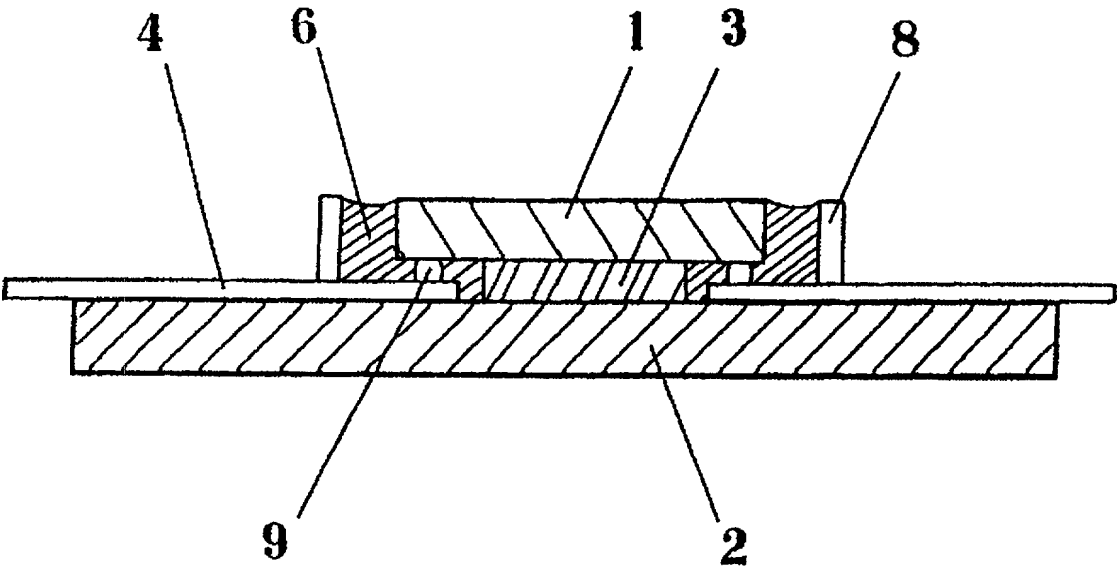

TSL1549

## Declaration and Power of Attorney For Patent Application

## 特許出願宣言書及び委任状

## Japanese Language Declaration

## 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

ADHESIVE AND SEMICONDUCTOR DEVICESADHESIVE AND SEMICONDUCTOR DEVICES

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ \_\_月\_\_日に提出され、米国出願番号または特許協定条約国際出願番号を\_\_\_\_とし、  
(該当する場合) \_\_\_\_\_に訂正されました。☐ was filed on \_\_\_\_\_  
as United States Application Number or  
PCT International Application Number  
\_\_\_\_\_ and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1章56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Page 1 of 4

Page 1 of 3

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner of Patents and Trademarks, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# Japanese Language Declaration (日本語宣言書)

TSL1549

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

## Prior Foreign Application(s)

外国での先行出願

JP11/193829(1999)

(Number)  
(番号)

Japan

(Country)  
(国名)(Number)  
(番号)(Country)  
(国名)

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

8 July 1999

(Day/Month/Year Filed)  
(出願年月日)(Day/Month/Year Filed)  
(出願年月日)

私は、第35編米国法典119条(e)項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

(Application No.)  
(出願番号)(Filing Date)  
(出願日)(Application No.)  
(出願番号)(Filing Date)  
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づく権利をここに主張します。また、本出願の各請求範囲の内容及び米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米特許出願に開示されていない限り、その先行米特許出願を提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)  
(出願番号)(Filing Date)  
(出願日)(Application No.)  
(出願番号)(Filing Date)  
(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう説明が真実であり、かつ私の入手した情報と私の信じることに基づく説明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Page 2 of 4

## Japanese Language Declaration

TSL1549

(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の  
手続を米特許商標局に対して実行する弁護士または代理人  
として、下記の者を指名いたします。(弁護士、または代理  
人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint  
the following attorney(s) and/or agent(s) to prosecute this  
application and transact all business in the Patent and Trademark  
Office connected therewith (list name and registration number)

Robert L. McKellar,	Registration Number 26,002
James E. Bittell,	Registration Number 29,133
Patricia M. Scaduto	Registration Number 39,827
C. Clay Carter,	Registration Number 27,185
Roger E. Gobrogge,	Registration Number 33,616
Sharon K. Severance,	Registration Number 34,010
Timothy J. Troy,	Registration Number 36,951
Larry A. Milco,	Registration Number 41,196

## 書類送付先

Dow Corning Corporation  
Intellectual Property Department  
Mail C01232  
P. O. Box 994  
Midland, MI 48686-0994

## Send Correspondence to:

Dow Corning Corporation  
Intellectual Property Department  
Mail C01232  
P. O. Box 994  
Midland, MI 48686-0994

## 直接電話連絡先: (名前及び電話番号)

## Direct Telephone Calls to: (name and telephone number)

Larry A. Milco, (517) 496-3161

唯一または第一発明者名 <b>Kimio Yamakawa</b>	Full name of sole or first inventor <b>Kimio Yamakawa</b>
発明者の署名 日付	Inventor's signature Date
住所	Residence
国籍	Citizenship
私書箱	Post Office Address
第二共同発明者 <b>Minoru Isshiki</b>	Full name of second joint inventor, if any <b>Minoru Isshiki</b>
第二共同発明者 日付	Second inventor's signature Date
住所	Residence
国籍	Citizenship
私書箱	Post Office Address

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**Japanese Language Declaration**  
(日本語宣言書)

TSL1549

委任状: 私は下記の発明者として、本出願に関する一切の  
手続きを米特許商標局に対して遂行する弁理士または代理人  
として、下記の者を指名いたします。(弁理士、または代理  
人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint  
the following attorney(s) and/or agent(s) to prosecute this  
application and transact all business in the Patent and Trademark  
Office connected therewith (list name and registration number)

書類送付先

Send Correspondence to:

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

唯一または第一発明者名 <b>Katsutoshi Mine</b>		Full name of sole or first inventor <b>Katsutoshi Mine</b>	
発明者の署名	日付	Inventor's signature	Date
住所		Residence	
国籍		Citizenship	
私書箱		Post Office Address	
第二共同発明者		Full name of second joint inventor, if any	
第二共同発明者	日付	Second inventor's signature	Date
住所		Residence	
国籍		Citizenship	
私書箱		Post Office Address	

Page 4 of 4

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)